








**Line - plafonnier en applique LED 230 V**













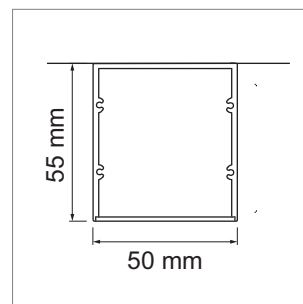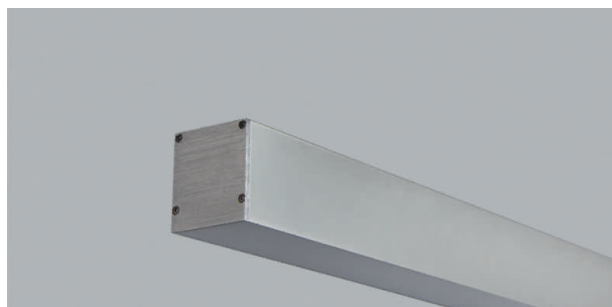




■ alu brossé blanc


	couleur	watts	couleur lumière	lumen	longueur
79.60220.30	aluminium	16 W	3000 K	2060 lm	580 mm
79.60221.30	aluminium	26 W	3000 K	3100 lm	870 mm
79.60222.30	aluminium	33 W	3000 K	4140 lm	1140 mm
79.60223.30	aluminium	40 W	3000 K	5170 lm	1430 mm
79.60220.40	aluminium	18 W	4000 K	2200 lm	580 mm
79.60221.40	aluminium	26 W	4000 K	3300 lm	870 mm
79.60222.40	aluminium	33 W	4000 K	4400 lm	1140 mm
79.60223.40	aluminium	40 W	4000 K	5500 lm	1430 mm

- i**
- Sans stock, délai de livraison env.2 semaine.
  - Autre version sur demande.



**Line air - lampe à suspension LED 230 volts**











- alu brossé blanc
- support de montage: 2000 mm
- câble de raccordement: 2000 mm claire

	couleur	watts	couleur lumière	lumen	longueur
79.60224.30	aluminium	18 W	3000 K	2060 lm	580 mm
79.60225.30	aluminium	26 W	3000 K	3100 lm	870 mm
79.60226.30	aluminium	33 W	3000 K	4140 lm	1140 mm
79.60227.30	aluminium	40 W	3000 K	5170 lm	1430 mm
79.60224.40	aluminium	18 W	4000 K	2200 lm	580 mm
79.60225.40	aluminium	26 W	4000 K	3300 lm	870 mm
79.60226.40	aluminium	33 W	4000 K	4400 lm	1140 mm
79.60227.40	aluminium	40 W	4000 K	5500 lm	1430 mm

- i**
- Sans stock, délai de livraison env. 2 semaines.
  - Autre version sur demande.



**i** Informations techniques et légende des icônes sur les pages A-1.79.