

LED Industrie- und Raumbelichtung

OntopLine, Ontop cable, Ontop power supply

OntopLine LED 24 V DC

- Light strip assembly by simply plugging the line modules together
- Profile mesures (wxh): 18 mm x 12 mm
- 36 months warranty (irrespective of turn-on time)

	length	power	light colour	Lumen	index Ra
79.60000.27	605 mm	5 W	2700 K	450 lm	>90
79.60000.40	605 mm	5 W	4000 K	450 lm	>80
79.60000.60	605 mm	5 W	6000 K	520 lm	>80
79.60002.27	1000 mm	8 W	2700 K	700 lm	>90
79.60002.60	1000 mm	8 W	6000 K	780 lm	>80
79.60004.27	1200 mm	10 W	2700 K	850 lm	>90
79.60004.60	1200 mm	10 W	6000 K	890 lm	>80



- Order the power pack separately (page A-1.64), energy label (page A-1.91).
- For installation using clips.

- Maximum strain depends on power pack 30/60 watt.
- Do not mix strip lengths as this may cause color deviations.



Ontop - Interconnection line 24 V DC

For interconnecting power supply unit to OntopLine and OntopLine to OntopLine.

- coded for OntopLine 24 Volt DC


	electric main	electric main	length
79.60031.11	white	max. 60 W	200 mm
79.60032.11	white	max. 60 W	500 mm
79.60033.11	white	max. 60 W	1000 mm



Ontop - Power pack 230/24 V DC

- Primary cable 1500 mm with Euro- Flat plug
- Secondary cable 900 mm for Ontop LED-Line

	finish	watt	length	width	height
79.60020.11	white	30 W	145 mm	45 mm	30 mm

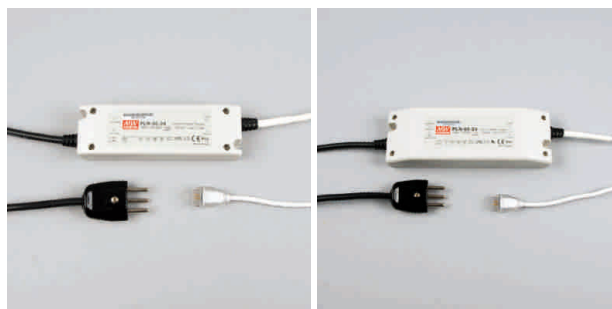

- Energy label (page A-1.91), RA-Faktor (page A-1.90), Lumen (page A-1.90), Light colour (page A-1.90).