



Line - LED-Aufbauleuchte 230 V

- Farbwiedergabe: Ra >84
- Schutzart: IP40
- Aluminium gebürstet
- Masse (BxH): 50 mm x 55 mm

	Farbe	Watt	Lichtfarbe	Lumen	Länge
79.60220.30	Aluminium	12.6 W	3000 K	2200 lm	580 mm
79.60221.30	Aluminium	18.8 W	3000 K	3300 lm	870 mm
79.60222.30	Aluminium	25.0 W	3000 K	4400 lm	1140 mm
79.60223.30	Aluminium	31.3 W	3000 K	5500 lm	1430 mm
79.60220.40	Aluminium	16.7 W	4000 K	2230 lm	580 mm
79.60221.40	Aluminium	37.5 W	4000 K	4350 lm	870 mm
79.60222.40	Aluminium	48.3 W	4000 K	5630 lm	1140 mm
79.60223.40	Aluminium	61.3 W	4000 K	7160 lm	1430 mm



- i** • Kein Lagerartikel, Lieferzeit ca. 1 Woche.
- Weitere Ausführungen auf Anfrage.

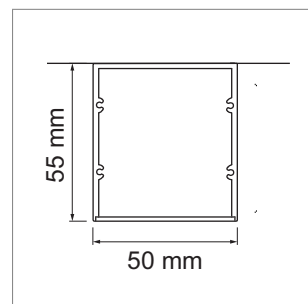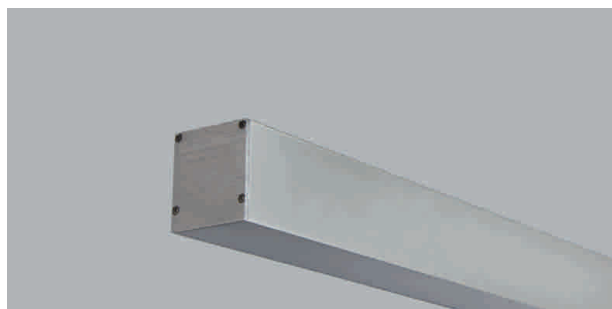


Line air - LED-Pendelleuchte 230 V

- Farbwiedergabe: Ra >84
- Schutzart: IP40
- Aluminium gebürstet
- Pendelaufhängung: 2000 mm
- Anschlussleitung: 2000 mm klar
- Masse (BxH): 50 mm x 55 mm

	Farbe	Watt	Lichtfarbe	Lumen	Länge
79.60224.30	Aluminium	12.6 W	3000 K	2200 lm	580 mm
79.60225.30	Aluminium	18.8 W	3000 K	3300 lm	870 mm
79.60226.30	Aluminium	25.0 W	3000 K	4400 lm	1140 mm
79.60227.30	Aluminium	31.3 W	3000 K	5500 lm	1430 mm
79.60224.40	Aluminium	16.7 W	4000 K	2230 lm	580 mm
79.60225.40	Aluminium	37.5 W	4000 K	4350 lm	870 mm
79.60226.40	Aluminium	48.3 W	4000 K	5630 lm	1140 mm
79.60227.40	Aluminium	61.3 W	4000 K	7160 lm	1430 mm



- i** • Kein Lagerartikel, Lieferzeit ca. 1 Woche.
- Weitere Ausführungen auf Anfrage.

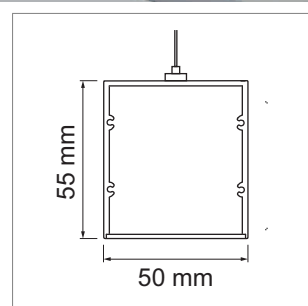

i Energielabel (Seite A-1.91), RA-Faktor (Seite A-1.90), Lumen (Seite A-1.90), Lichtfarbe (Seite A-1.90).