

# LED industrial and room lighting

## Line LED surface mounted light - Line air pendant lamp



### Line - Surface mounted LED light 230 V

- Colour reproduction: Ra >84
- protection class: IP40
- Aluminium brushed
- Measures (wxh): 50 mm x 55 mm

	finish	watt	light colour	lumen	length
79.60220.30	aluminum	12.6 W	3000 K	2200 lm	580 mm
79.60221.30	aluminum	18.8 W	3000 K	3300 lm	870 mm
79.60222.30	aluminum	25.0 W	3000 K	4400 lm	1140 mm
79.60223.30	aluminum	31.3 W	3000 K	5500 lm	1430 mm
79.60220.40	aluminum	16.7 W	4000 K	2230 lm	580 mm
79.60221.40	aluminum	37.5 W	4000 K	4350 lm	870 mm
79.60222.40	aluminum	48.3 W	4000 K	5630 lm	1140 mm
79.60223.40	aluminum	61.3 W	4000 K	7160 lm	1430 mm



- No stock items, Delivery time about 1 week.
- Further light types upon request

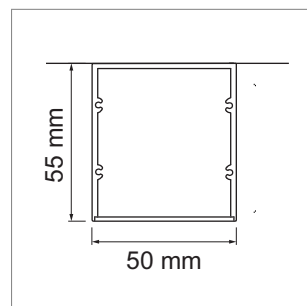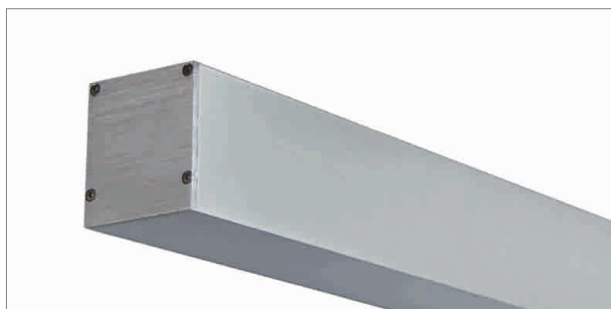



### Lin air - Pendant lamp LED 230 V

- Colour reproduction: Ra >84
- protection class: IP40
- Aluminium brushed
- mounting bracket: 2000 mm
- Connecting cable: 2000 mm clear
- Measures (wxh): 50 mm x 55 mm

	finish	watt	light colour	lumen	length
79.60224.30	aluminum	12.6 W	3000 K	2200 lm	580 mm
79.60225.30	aluminum	18.8 W	3000 K	3300 lm	870 mm
79.60226.30	aluminum	25.0 W	3000 K	4400 lm	1140 mm
79.60227.30	aluminum	31.3 W	3000 K	5500 lm	1430 mm
79.60224.40	aluminum	16.7 W	4000 K	2230 lm	580 mm
79.60225.40	aluminum	37.5 W	4000 K	4350 lm	870 mm
79.60226.40	aluminum	48.3 W	4000 K	5630 lm	1140 mm
79.60227.40	aluminum	61.3 W	4000 K	7160 lm	1430 mm



- No stock items, Delivery time about 3 week.
- Further light types upon request

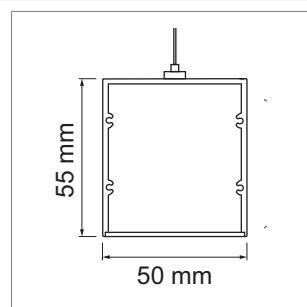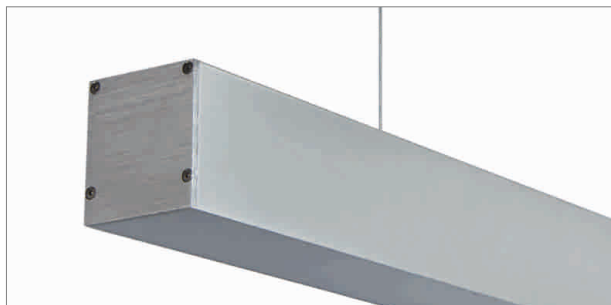

Energy label (page A-1.91), RA-Faktor (page A-1.90), Lumen (page A-1.90, Light colour (page A-1.90).