








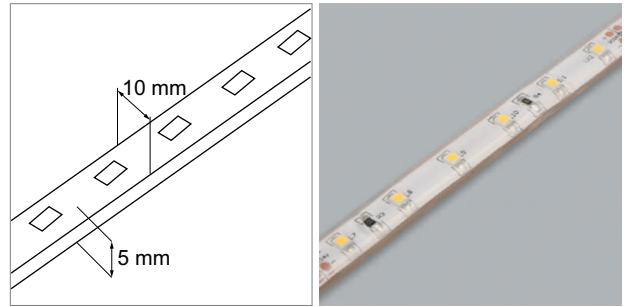


LED Profil lights

LED-Strip - Phoenix, Side View, Low, Leo

Phoenix LED-Strip 24 volt DC

 24V	 120°	 dimmable	 CRI >82	 IP67	 CE	 A+
						












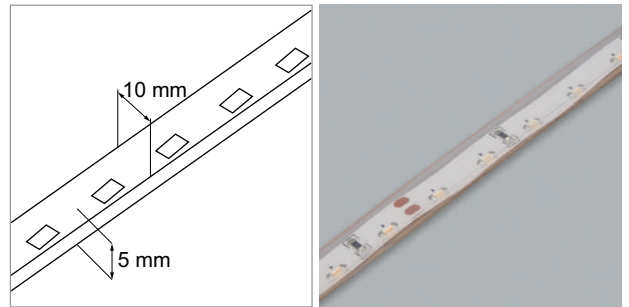
▪ online configurator

	description	power	light colour	lumen
71.20072.11	assembled	2.0 W	3000 K	160 lm

i Order the power pack separately (page A-1.19), Lighting control (pages A-1.19 - A-1.21).

Side View - LED-Strip 24 volt DC

 24V	 120°	 dimmable	 CRI >76	 IP67	 CE	 A+
						



▪ online configurator

	description	power	light colour	lumen
71.20071.11	assembled	2.0 W	3000 K	160 lm

i Order the power pack separately (page A-1.19), Lighting control (pages A-1.19 - A-1.21).

Low LED-Strip flex 24 Volt DC

 24V	 120°	 dimmable	 CRI 80	 IP20	 CE	 A++	
---	--	--	--	--	--	---	---

- LED per meter: 60
- LED point of intersection: all 100 mm

	watts/m	light colour	lumen/m	length
76.50300.30	4.8 W	3000 K	374 lm	5000 mm
76.50300.40	4.8 W	4000 K	374 lm	5000 mm



i For Aluminum Profile:
 Bano, Cover, Delta, Derby, Mano, Manico, Railo, Slim, Tango, Tec
 • Order the Profile separately (pages A-1.01 - A-1.14), power pack (page A-1.19), Lighting control (pages A-1.19 - A-1.21).

Leo LED-Strip flex 24 Volt DC

 24V	 120°	 dimmable	 CRI >90	 IP20	 CE	 A++	
---	--	--	---	--	--	---	---

- LED per meter: 120
- LED point of intersection: all 50 mm

	watts/m	light colour	lumen/m	length
76.50301.27	9.6 W	2700 K	700 lm	5000 mm
76.50301.30	9.6 W	3000 K	700 lm	5000 mm
76.50301.40	9.6 W	4000 K	700 lm	5000 mm



i For Aluminum profile:
 Bano, Cover, Delta, Derby, Free, Mano, Manico, Railo, Slim, Tango, Tec